



DUPLEXERS

406-512 MHz

IN RANGES OF:
 406 - 430 MHz
 442 - 450 MHz
 450 - 470 MHz
 470 - 512 MHz




(PATENTED)




450-470 MHz
 100 dB ISOLATION AT 5.0 MHz SEPARATION
 350 WATT POWER RATING
 MODEL 28-70-02A

19" RACK MOUNTS
 MODEL NOS.
 28-65-02A 28-69-02A
 28-65-07A 28-69-06A
 28-66-02A 28-70-02A
 28-70-09A
 (ALTERNATE MOUNT AT LEFT)

ALTERNATE MOUNT "B"
 19" REVERSE FLUSH MOUNT
 MODEL NOS.
 28-65-02B 28-69-02B
 28-65-07B 28-69-06B
 28-66-02B 28-70-02B
 28-70-09B

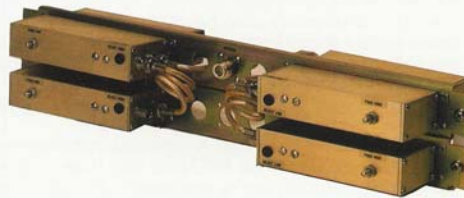

19" RACK MOUNTS
 MODEL NOS.
 28-65-09A
 28-71-01A
 28-72-01A

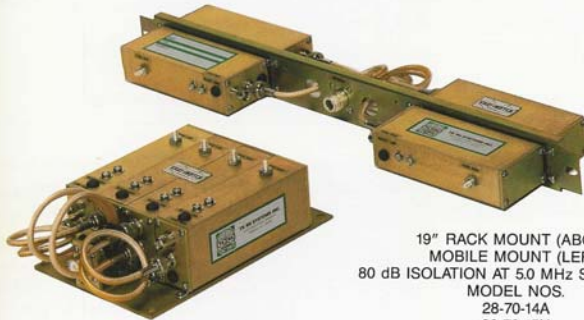

19" RACK MOUNT (ABOVE)
 MOBILE MOUNT (LEFT)
 80 dB ISOLATION AT 5.0 MHz SEPARATION
 MODEL NOS.
 28-70-14A
 28-70-15H

DUPLEXERS • CAVITY FILTERS • MULTICOUPLER SYSTEMS • SIGNAL BOOSTER SYSTEMS • RF SYSTEM PRODUCTS

TX RX SYSTEMS INC. 8625 INDUSTRIAL PARKWAY, ANGOLA, NY 14006-9696
TELEPHONE 716-549-4700 FAX 716-549-4772 [24 HRS.]

A MEMBER OF BIRD TECHNOLOGIES GROUP



DUPLEXERS: 406-512 MHz



C1034G91V2.0